


FM60 CUBERA AI




The pin functions of the 10-pin DuPont connector:

PIN#	Signal	I/O	Function
1	USB D+	Input/Output	USB_D+
2	USB_D-	Input/Output	USB_D-
3	GND	Ground	Ground
4	RS232_RTS	Output	RS-232 level RTS output
5	RS232_CTS	Input	RS-232 level CTS input
6	RS232_RX	Input	RS-232 level RX input
7	RS232_TX	Output	RS-232 level TX output
8	VCC5V	Input	5-12V Power Input
9	EXT_TRIG#	Input	Reserved Trigger Signal
10	EXT_DSF	Output	3.3V good read indicator/beeper control signal

Interface:

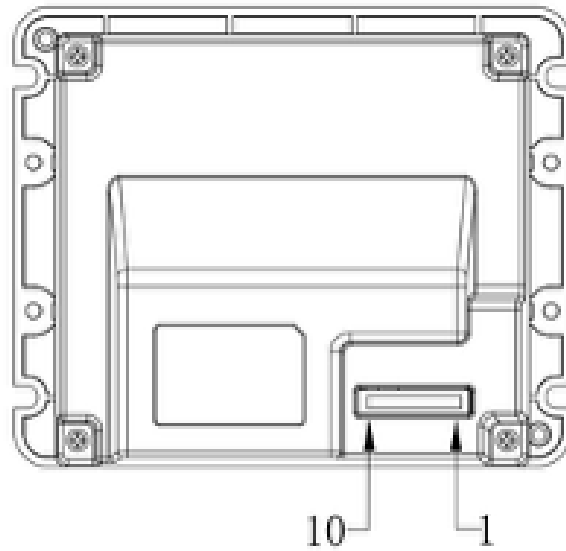

Dimensions (unit: mm)

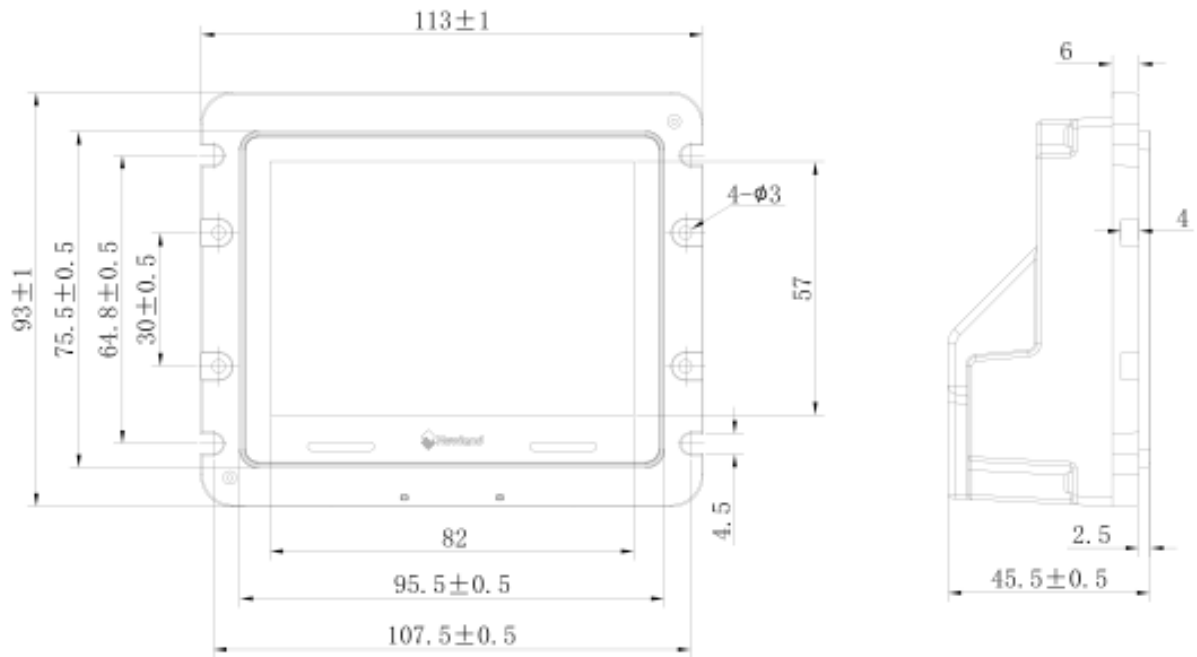

Dimensions: 114 (W)x46(D)x94(H) mm (max.)