


Low battery may result in malfunction of the terminal.
Before using the MT37 for the first time, charge the battery for at least 8 hours.

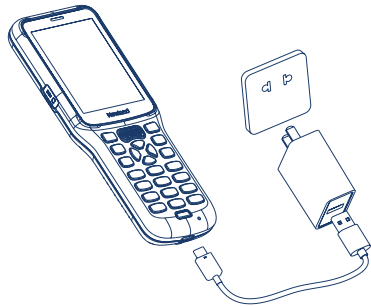


Connect the USB connector to a power outlet using the AC adapter and cable. (Do not plug or pull the USB connector violently to avoid damage).

** The AC adapter should be bought separately and recommend to use 5V/2A.*

1

Scan/decode LED Charging LED




Scan / Decode LED	
Blue LED flashes once	Decode successfully
Charging LED	
Blue LED on	Fully charged
Red LED on	Charging in progress
Red LED flashes	Low-battery alert

2

Adjust the scan angle and the distance between the MT37 and the target barcode to make them fall into the following ranges:

- 1 Point the MT37's focus lamp at the center of the barcode.
- 2 Move the MT37 until you find the appropriate scan distance.
- 3 Optimum scan angles:
Skew (α) < 45° (0° preferably)
Pitch (γ) < 45° (5° - 20° preferably)
Roll (β) = 0° - 360°

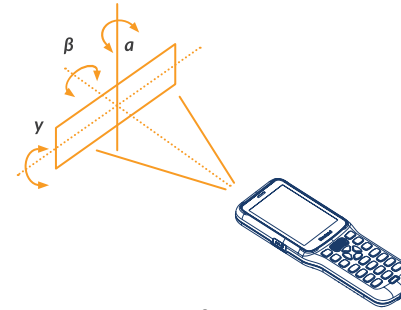


3

- 1 Do not charge in direct sunlight or humid environment. If the AC adapter is faulty, please replace with a new one recommended by manufacturer.
- 2 Do not use the terminal's wireless functionalities where wireless device use is prohibited or where it may cause interference or danger, such as aircrafts, petrol stations.
- 3 Do not throw, drop or strike the terminal. Doing may damage the LCD display, interrupt programs, cause data loss in memory and result in malfunction.
- 4 Clean the scan window regularly. Do not touch it with hands. Scratched or smudged window may degrade reading performance.
- 5 Use only a dry soft cloth to clean the terminal. Cleaning it with wet cloth or benzene/thinner/other volatile chemicals may deform and shorten the service life of the keypad and shell of the terminal.
- 6 Sudden temperature drops may cause condensation on the shell, which could cause malfunction. Care should be taken to avoid condensation. If condensation occurs, dry the terminal before use.

4

Key

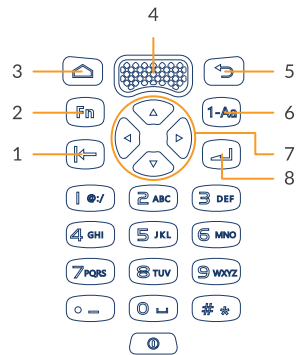


1	Backspace key	2	Fn key
3	Home key	4	Scan key
5	Return key	6	Alphanumeric key
7	Navigation key	8	Enter key

** When Fn key is pressed, the number key 0-9 will be activated as user-defined key F1-F10. Fn+0 refers to F10.*

5

Installing the SIM card



SIM card tray

- Step 1: Open the cover of SIM card slot.
- Step 2: Pull the tray out from the slot and put the SIM card on it.
- Step 3: Then, gently push the tray into the slot until it locks in place. Finally close the cover.

** Remark: The SIM card slot is with fool-proof design, please do not insert or pull violently to avoid damage.*

6

More information



Visit our website
newland-id.com

MT37
Baiji

