



1

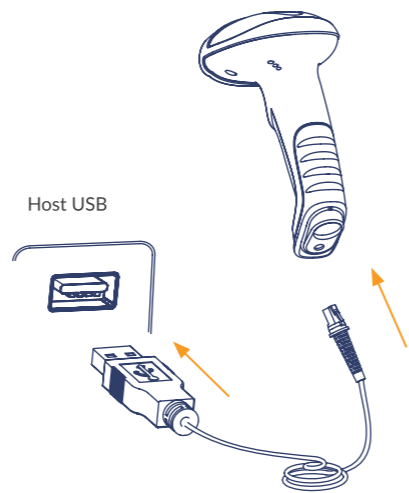

2

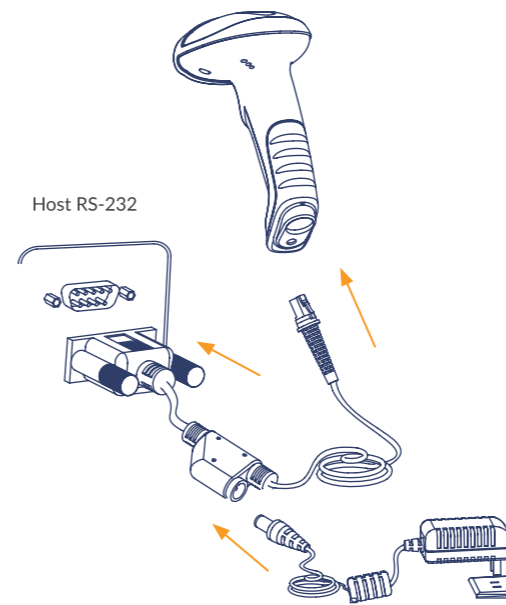


3

Note: The host refers to PC, POS or another terminal equipped with USB or RS-232 interface.



Note: Asterisks (**) indicate factory default values.

4



Disable terminating character suffix



** Enable terminating character suffix



** Set terminating character to CR (carriage return)

5

Caution

Use of controls or adjustments or performance of procedures other than those specified herein may result in hazardous radiation exposure.



IEC60825-1:2014

1 mW 650nm

Angle of divergence < 1mRad

Pulse time:

LASER RADIATION

DO NOT STARE INTO BEAM

CLASS 2 LASER PRODUCT

Intrabeam viewing of the laser shall be prevented!



6



Visit our website
newland-id.com



HR52
Bonito
Corded

